


S Band Patch Antenna with SMA Interface Control Document

- Single Patch Antenna with SMA
- 70 x 70 mm, 2085 MHz

HIGHLIGHTS

- Circular polarization (RHCP)
- TRL 9 for basic design
- Flight Heritage since 2017
- Compatible to 1U CubeSat
- Robust design

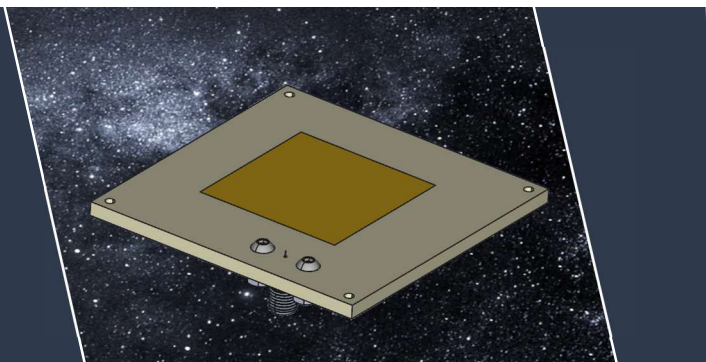

This **COTS antenna** is designed for small satellite applications to realize satellite-to-ground radio links.

With circular polarization, the antenna provides a robust antenna solution regarding the steering accuracy to the ground station antenna and in case of a randomly rotation of wave polarization plane by refracts of the ionosphere.

As RF connectors, robust connectors of type SMA female (manufacturer RADIALL) are used.
A proper mounting of the antenna can be provided by 4 screws.

The antenna backside shall be grounded properly to the satellite chassis.

As dielectric, ROGERS™ laminate for space applications is used. Patches and conductors are copper with gold surface finish.

With the basic design, TRL9 has been achieved with various successful LEO missions.

FEATURES

- Flight grade tested design
- Patch antenna design matched to customer specific frequencies
- Short delivery time

KEY SPECIFICATIONS

Tx center frequency:
2.085 GHz

RF bandwidth Tx:
30 MHz

**Maximum gain:
(main direction)**
6 dBi

Polarization:
RHCP

Connector type:
SMA (f)

Beam width:
 $\pm 40^\circ \times \pm 40^\circ$

RF power input:
< 2W

**Temperature range:
(operationally)**
-30°C ... +60°C
VSWR
< 1.25 center freq.
< 1.8 for freq. range

Impedance:
50 Ω

Type:
Single Patch

Mass:
 ≈ 49 grams

**Outer dimensions
(x/y/z, w/o connector):**
70 x 70 x 3.4 mm³

Document Information

Action	Name / Signature	Company	Date
Prepared by	SPI Stefan Pirwitz	IQ spacecom	2020-04-16
Checked by	KJÄ Klaus Jäckel	IQ spacecom	2020-04-17
Product assurance	AWE Andreas Weiland	IQ spacecom	2020-04-17
Authorized by	MRE Mathias Reibe	IQ spacecom	2020-04-17

Issue	Date	Page and/or paragraph affected	Change description	Responsible
00	2020-01-20		Initial issue	Author SPI
01	2020-04-16		CD Update	SPI
02	2024-02-26		Data sheet design updated	TSO
03	2026-04-22		Updated wording	JML
04	2026-06-25	1	Updated wording	TMA

Mechanical Dimensions

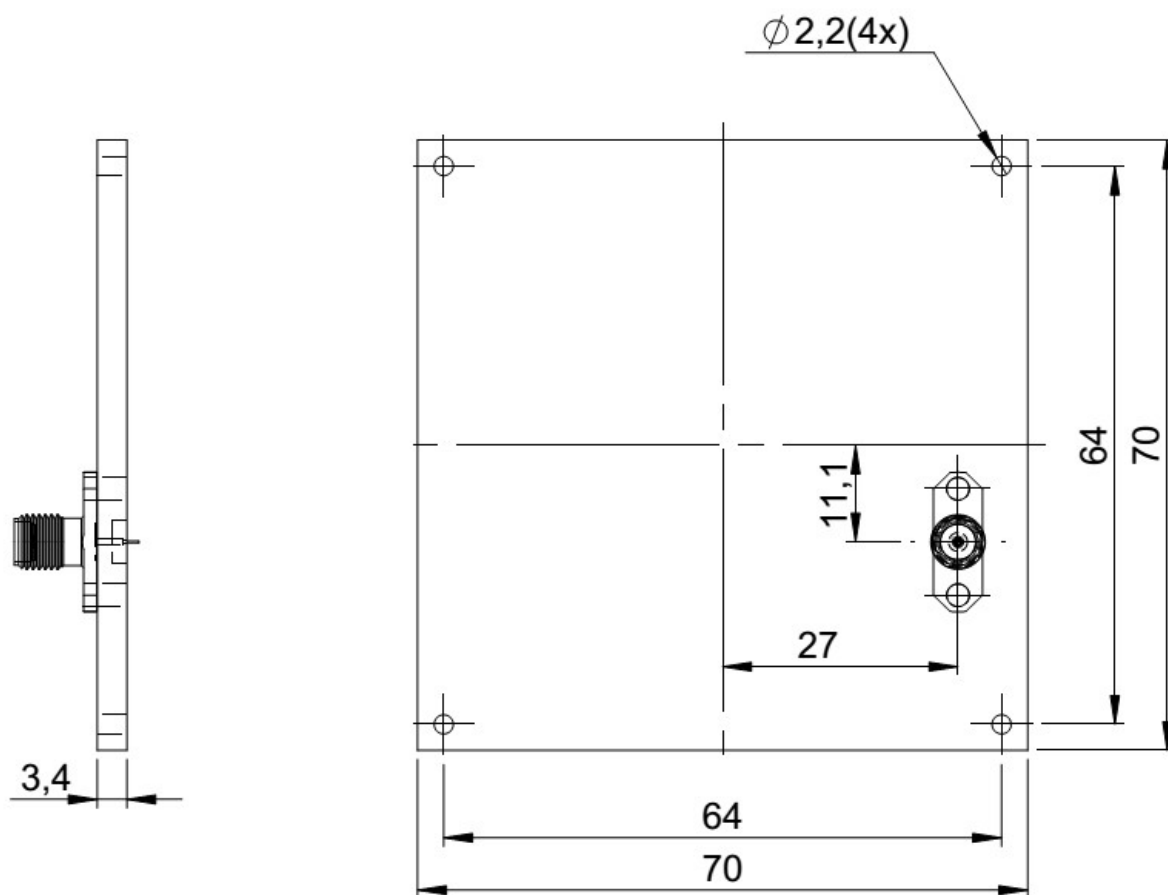


Figure 1: Mechanical dimensions and positions of RF connectors. All tolerances for all mechanical dimensions are $\pm 0.1\text{mm}$, for connector $\pm 0.5\text{mm}$ and high (z-dimension) $\pm 10\%$. These are based on manufacturing tolerances by the PCB manufacturer.



Figure 2: Antenna realization (similar type)

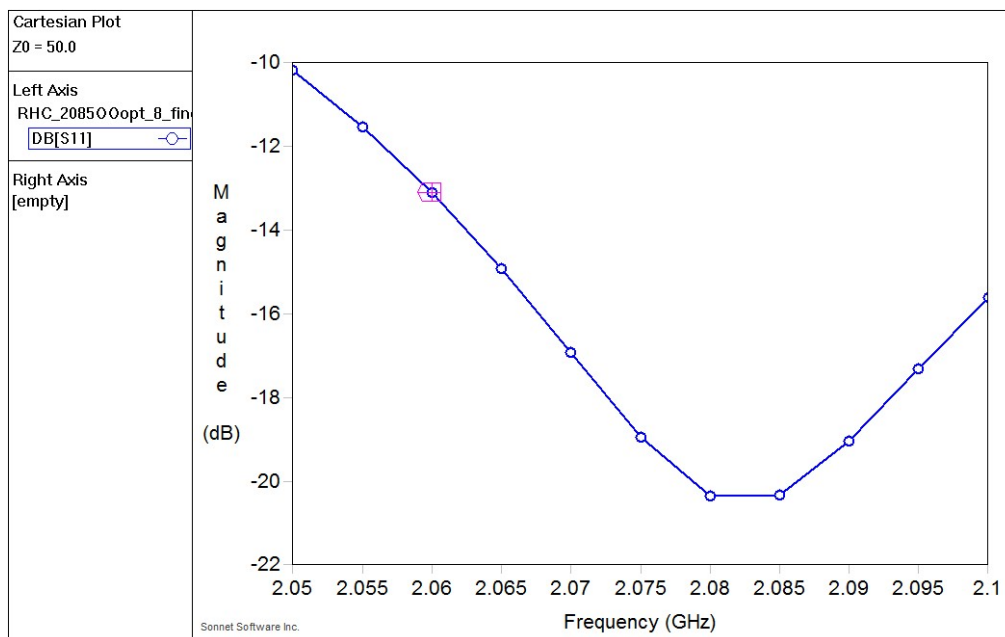


Figure 3: Simulation results of impedance matching (S11, blue)

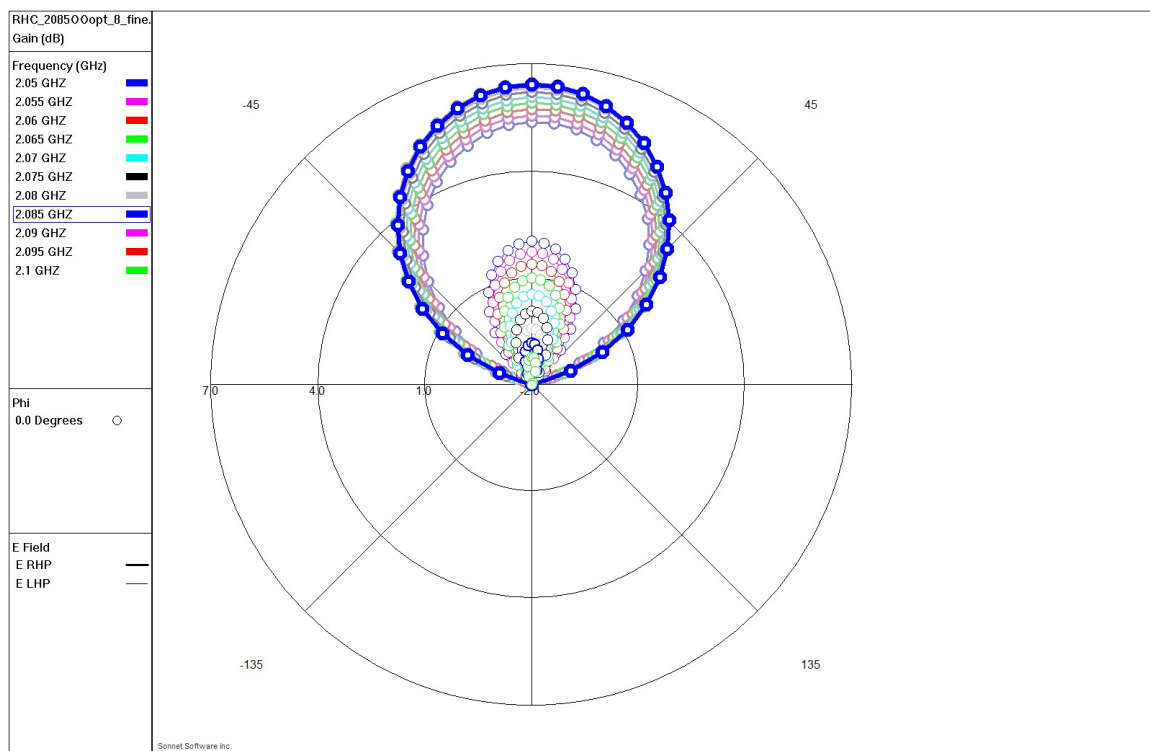


Figure 4: Simulation results of antenna pattern 0°, RHC (bold) vs. LHC

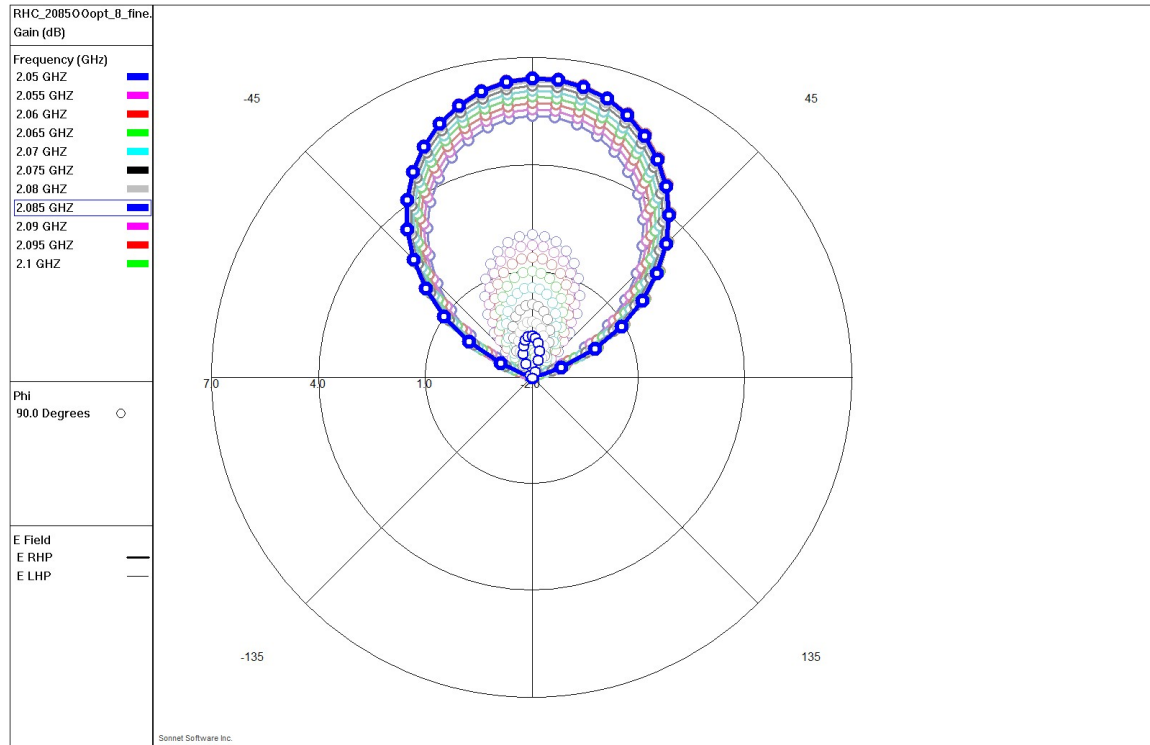


Figure 5: Simulation results of antenna pattern, 90° RHC (bold) vs. LHC

Interfacing and Mounting Hints for the Antenna

Please use suitable screws and washers according to your specific requirements for mounting the antenna to the satellite chassis. Mounting of the antenna is by 4 of those screws and washers with positions as indicated in figure 1. Please ensure that the mounting area is plane.

A step file for the antenna could be provided on request.

CAUTION:



Although all external interfaces are protected against ESD, proper precautions and grounding must still be observed when handling the device. Antenna backside and outer conductors of RF connectors and feeders have electrical ground potential. They should be connected properly to satellite chassis (ground).

CAUTION:



When interfacing and operating the antennas with radio transmitters, generators or similar equipment, special care is required regarding a potential irregular radio wave radiation. Please ensure that maximum power ratings are kept. RF interfaces to be connected to the antenna ports should be free of DC.



Please make sure that no obstacles are arranged or mounted in beam direction of the antenna patches.

The information given herein has been compiled as carefully as possible; nonetheless, errors and omissions may occur in this document. IQ Technologies for Earth and Space GmbH reserves the right to change specifications without notice. IQ spacecom is a trademark of IQ Technologies for Earth and Space GmbH. All other trademarks are the property of their respective holders and are acknowledged. Copying of this document and giving it to others, and the use or communication of the contents thereof, are forbidden without express authority.

All rights reserved © IQ Technologies for Earth and Space GmbH.